


24 Vdc Power Supply

Application and Description

Use the power supply to convert 10–45 Vdc, 90–150 Vdc, or 88–132 Vac 50/60 Hz input voltage to a regulated, 24 Vdc output voltage.

The power supply is self-contained in a compact, die-cast aluminum box with a terminal strip for all connections.

The power supply provides two 0.5 A outputs or a single 1.0 A output. The supply has isolated circuits to avoid transient response and noise.

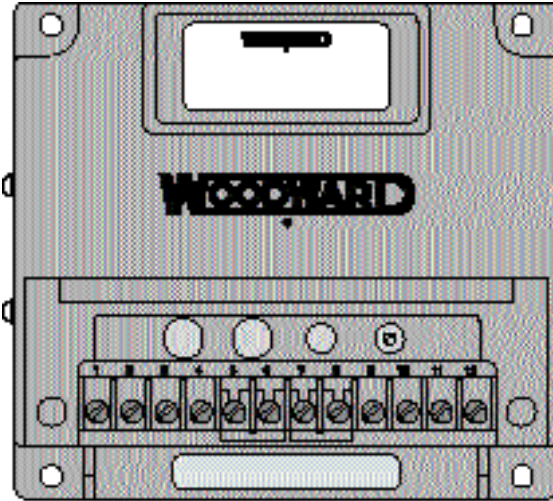

- No adjustments
- Transient spike protected
- Low ripple
- Compact size
- Regulated output

Specifications

Input


Voltage	10–45 Vdc (low voltage model) 90–150 Vdc or 88–132 Vac, 50/60 Hz (high voltage model)
Power	35 W maximum

Output

Voltage	24 Vdc \pm 10%
Ripple	Approximately 1% at full load
Maximum Current	2 outputs of 0.5 A each 1 output of 1.0 A

Attitude


Any position

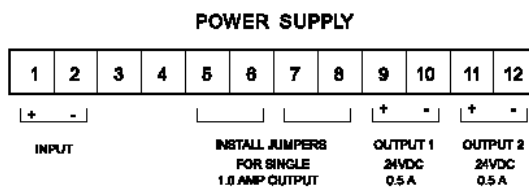

NOTE: WITH JUMPERS INSTALLED, EITHER OR BOTH OUTPUT TERMINALS MAY BE USED.

PLANT WIRING

WOODWARD
01-00-00 000

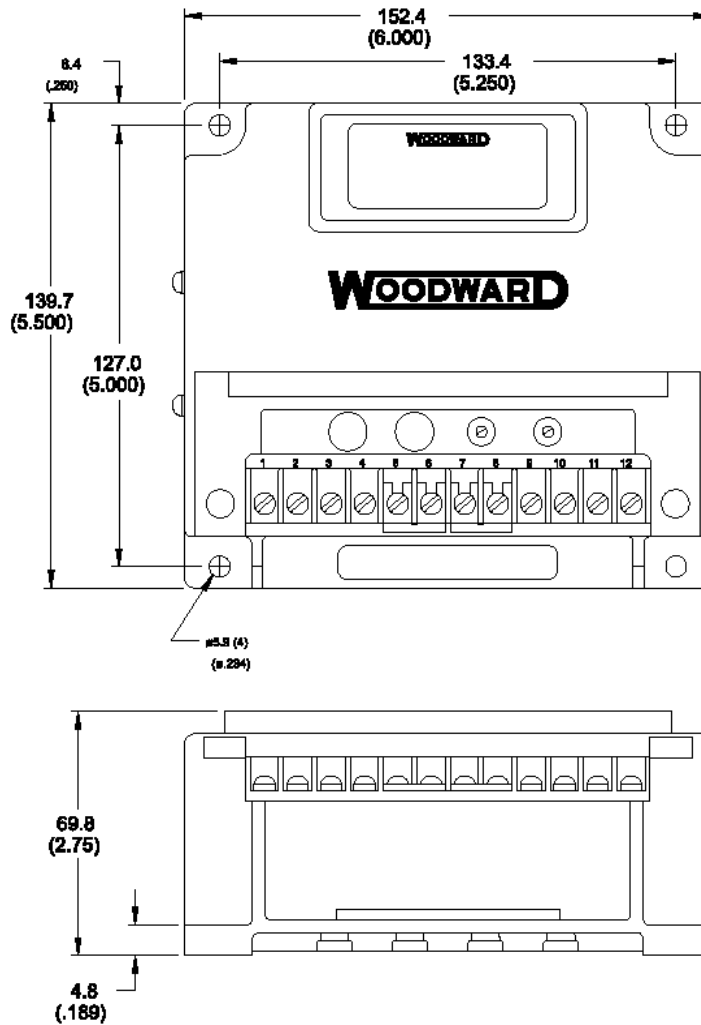

8200-4-240
00-08-17 MCL

Outline Drawing
(Do not use for construction)



PO Box 1519, Fort Collins CO, USA 80522-1519
1000 East Drake Road, Fort Collins CO 80525
Tel.: +1 (970) 482-5811 • Fax: +1 (970) 498-3058
www.woodward.com

Distributors & Service

Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward contractual or warranty obligation unless expressly stated in a written sales contract.

Copyright © Woodward 1990–2001, All Rights Reserved

For more information contact:

